



Product Description

PLT Lamps

CFL PLT bulb is a triple tube plug-in compact fluorescent lamp with G24Q 4 pin base, providing high brightness light and consuming less power than traditional incandescent bulbs. Due to high efficiency, long lifetime and good color rendering make PLT bulb a popular choice for office, hotel, retail store and home.

Advantage

- Energy Efficient

CFL PLT bulb uses less electricity than traditional incandescent bulbs, signally reducing energy costs.

- Long lifespan


The average lifespan is 10000 hours, CFL PLT bulb can reduce the frequency of replacements and maintenance than incandescent bulb.

- Stable Performance

CFL PLT bulb always provides flicker-free, glare-free, high CRI(RA>80) and steady light output in long time use.

-Various options

CFL PLT bulb is available in 13W, 18W, 26W, 32W, 42W, 57W with 2700K, 3500K, 4100K, 5000K, 6500K color temperatures. Among these models, the PLT 26W 4 pins bulb, PL T 32W 4 pins bulb and PLT 42W 4 pins bulb are the hot sale lamps.

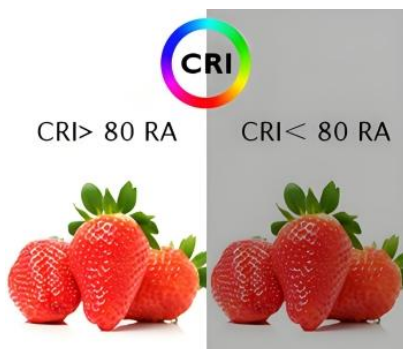

Good color rendering



G24Q 4 pin base



II shape and U shape

PLT Lamps

Feature

- ✓ CRI>80
- ✓ Triple tubes
- ✓ G24Q 4 pin base
- ✓ 10000 hours life span

Application

CFL PLT bulb is commonly used in downlights, ceiling fixtures, wall lights, bedside lights and other compact fittings. Providing bright, soft and stable lighting for daily activities, PLT lamp is popular in offices, homes, retail stores and hotels.



Ceiling lights



Bedside lights



Downlights



Wall lights



Standing lights



Flood lights

PLT Lamps

Specification

Model	Base	Wattage	Dimension(mm)				Luminous Flux	Color Temperature	Rated lamp life	CRI (Ra)	Voltage
			A	B	C	D					
PL-T	GX24Q-1	13W	71	106	38	12	900LM	2700K 3500K 4100K 5000K 6500K	10000H	≥80	220-240V 110-130V
PL-T	GX24Q-2	18W	76	111	38	12	1200LM				
PL-T	GX24Q-3	26W	102	132	38	12	1608LM				
PL-T	GX24Q-3	32W	107	147	38	12	1852LM				
PL-T	GX24Q-4	42W	127	167	38	12	2060LM				
PL-T	GX24Q-5	57W	158	198	38	12	3400LM				

Dimensional drawing

